

ROULEMENTS DE PALIERS

Série standard

Série H / autolubrifiant

Série Inox



PF 200



SB 200

compass
H23

UC 200




UK 200



SSSB 200




SUC 200

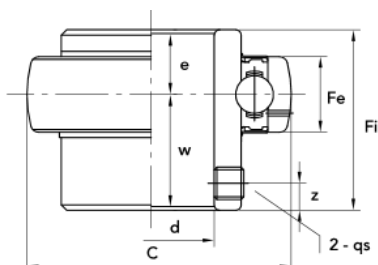

UC	Ø	C	Fi	Fe	e	w	z	qs	dyn N	stat N
201	12	47	31	17	12,7	18,3	4,8	M6	10000	6300
202	15	47	31	17	12,7	18,3	4,8	M6	10000	6300
203	17	47	31	17	12,7	18,3	4,8	M6	10000	6300
204	20	47	31	17	12,7	18,3	4,8	M6	10000	6300
205	25	52	34	17	14,3	19,7	5,5	M6	11000	7100
206	30	62	38,1	19	15,9	22,2	6	M6	15200	10200
207	35	72	42,9	20	17,5	25,4	6,5	M8	20100	13900
208	40	80	49,2	21	19	30,2	8	M8	25600	18100
209	45	85	49,2	22	19	30,2	8	M8	25600	18100
210	50	90	51,6	24	19	32,6	10	M10	27500	20200
211	55	100	55,6	25	22,2	33,4	10	M10	34000	25500
212	60	110	65,1	27	25,4	39,7	10	M10	41000	31500
213	65	120	65,1	28	25,4	39,7	10	M10	44800	34700
214	70	125	74,6	30	30,2	44,4	12	M12	48700	38100
215	75	130	77,8	30	33,3	44,5	12	M12	51900	41900
216	80	140	82,6	33	33,3	49,3	14	M12	57000	45500
217	85	150	85,7	35	34,1	51,6	14	M12	66000	53200
218	90	160	96	37	39,7	56,3	14	M12	75000	61700

Dimension pour la version UC, les valeurs peuvent varier selon le modèle.

Avant acquisition, merci de prendre contact avec nos services

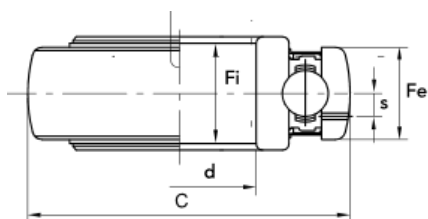

UK	Ø	C	Fi	Fe	Fi	s	N	N
207	30	72	28	20	30	5,6	20300	14000
208	35	80	29	21	34	6,2	23000	16000
209	40	85	31	22	36	6,3	25700	18100
210	45	90	31	24	36	6,5	27600	20100
211	50	100	34	25	40	7	34000	25500
212	55	110	36	27	47	7	41000	31500

Nos couvercles de protection vous assurent l'étanchéité de vos paliers.

Pour série Fonte (CI)

Pour série Thermoplastique (TP)



CCI	Ø
202	15
203	17
204	20
205	25
206	30
207	35
208	40
209	45
210	50
211	55



OCI	Ø
202	15
203	17
204	20
205	25
206	30
207	35
208	40
209	45
210	50
211	55



CTP	Ø
202	15
203	17
204	20
205	25
206	30
207	35
208	40
209	45
210	50
211	55



CTP	Ø
203	17
204	20
205	25
206	30
207	35
208	40
209	45
210	50