

# POULIES SYNCHROPOWER

2

T2,5					Lg 6				T & AT 5					Lg 10			Lg 16			Lg 25			
Z	Dp	De	Df	Dm	Ex	F	L	d	Z	Dp	De	Df	Dm	Ex	F	L	Ex	F	L	Ex	F	L	d
12	9,6	9	13	13	0F	9	16	-	10	15,9	15,1	20	8	1F	15	21	1F	21	27	1F	30	36	-
14	11,2	10,6	15	15	0F	9	16	-	12	19,1	18,3	23	11	1F	15	21	1F	21	27	1F	30	36	-
15	12	11,4	15	15	0F	9	16	-	14	22,3	21,5	25	13	1F	15	21	1F	21	27	1F	30	36	-
16	12,8	12,2	16	16	0F	9	16	-	15	23,9	23,1	28	16	1F	15	21	1F	21	27	1F	30	36	6
18	14,4	13,8	18	10	1F	10	16	-	16	25,5	24,6	32	18	1F	15	21	1F	21	27	1F	30	36	6
19	15,2	14,6	20	10	1F	10	16	-	18	28,7	27,8	32	20	1F	15	21	1F	21	27	1F	30	36	6
20	16	15,4	20	11	1F	10	16	-	19	30,3	29,4	36	22	1F	15	21	1F	21	27	1F	30	36	6
22	17,6	17	22	11	1F	10	16	-	20	31,8	31	36	23	1F	15	21	1F	21	27	1F	30	36	6
24	19,2	18,6	22	12	1F	10	16	4	22	35	34,2	38	24	1F	15	21	1F	21	27	1F	30	36	6
25	20	19,4	25	13	1F	10	16	4	24	38,2	37,4	42	26	1F	15	21	1F	21	27	1F	30	36	8
26	20,8	20,2	26	14	1F	10	16	4	25	29,8	39	44	26	1F	15	21	1F	21	27	1F	30	36	8
28	22,4	21,8	26	14	1F	10	16	4	26	41,4	40,6	44	26	1F	15	21	1F	21	27	1F	30	36	8
30	24	23,4	26	16	1F	10	16	6	27	43	42,2	48	30	1F	15	21	1F	21	27	1F	30	36	8
32	25,6	25	32	16	1F	10	16	6	28	44,6	43,8	48	32	1F	15	21	1F	21	27	1F	30	36	8
36	28,8	28,1	36	20	1F	10	16	6	30	47,8	47	51	34	1F	15	21	1F	21	27	1F	30	36	8
40	31,9	31,3	38	22	1F	10	16	6	32	50,9	50,1	54	38	1F	15	21	1F	21	27	1F	30	36	8
44	35,1	34,5	-	24	2	10	16	6	36	57,3	56,5	64	38	1F	15	21	1F	21	27	1F	30	36	8
48	38,3	37,7	-	26	2	10	16	6	40	63,7	62,9	67	40	1F	15	21	1F	21	27	1F	30	36	8
60	47,9	47,3	-	34	2	10	16	8	42	66,9	66	70	40	1F	15	21	1F	21	27	1F	30	36	8
									44	70,1	69,2	-	45	2	15	21	2	21	27	2	30	36	8
									48	76,4	75,6	-	50	2	15	21	2	21	27	2	30	36	8
									60	95,5	94,7	-	65	2	15	21	2	21	27	2	30	36	8


T & AT 10					Lg 16			Lg 25			Lg 32		Lg 50		
Z	Dp	De	Df	Dm	Ex	F	L	F	L	d	F	L	F	L	d
12	38	36	42	28	1F	21	31	30	40	6	-	-	-	-	-
14	45	43	48	32	1F	21	31	30	40	8	-	-	-	-	-
15	48	46	51	32	1F	21	31	30	40	8	-	-	-	-	-
16	51	49	54	35	1F	21	31	30	40	8	-	-	-	-	-
18	57	56	60	40	1F	21	31	30	40	8	37	47	56	66	10
19	61	59	66	44	1F	21	31	30	40	8	37	47	56	66	10
20	64	62	66	46	1F	21	31	30	40	8	37	47	56	66	12
22	70	68	75	52	1F	21	31	30	40	8	37	47	56	66	12
24	76	75	83	58	1F	21	31	30	40	8	37	47	56	66	12
25	80	78	83	60	1F	21	31	30	40	8	37	47	56	66	12
26	83	81	87	60	1F	21	31	30	40	8	37	47	56	66	12
27	86	84	91	60	1F	21	31	30	40	8	37	47	56	66	12
28	89	87	93	60	1F	21	31	30	40	8	37	47	56	66	12
30	96	94	102	60	1F	21	31	30	40	8	37	47	56	66	12
32	102	100	106	65	1F	21	31	30	40	10	37	47	56	66	12
36	115	113	119	70	1F	21	31	30	40	10	37	47	56	66	16
40	127	125	131	80	1F	21	31	30	40	10	37	47	56	66	16
44	140	138	-	88	2	21	31	30	40	10	37	47	56	66	16
48	153	151	-	95	2	21	31	30	40	16	37	47	56	66	16
60	191	189	-	110	2	21	31	30	40	16	37	47	56	66	16

2.38.0


# POULIES SYNCHROPOWER

Nos partenaires stock les poulies Synchro power dans les versions T & AT


## TYPE D'EXECUTION

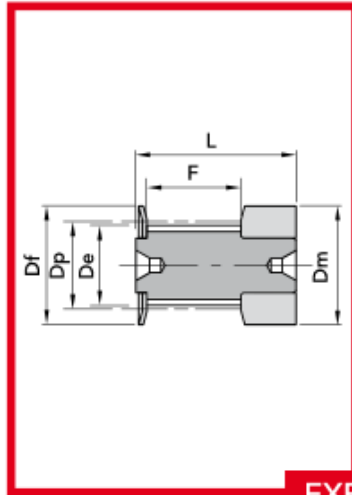

EXECUTION 0F

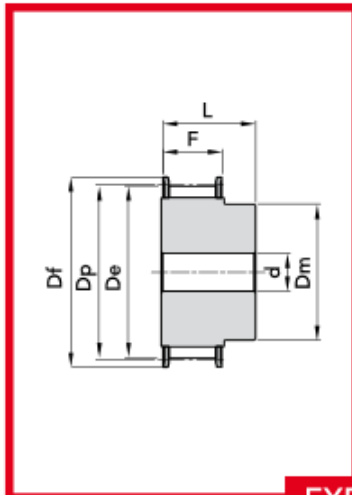

EXECUTION 1F

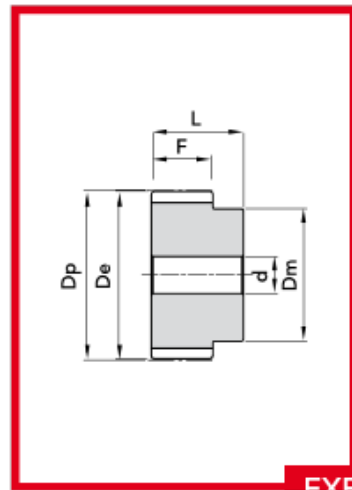

EXECUTION 2